

# WHITEFLEX Black Edition USB 2.0 cable black + flexible 2m

**Product number** ART-20  
**Length** 2000mm




## Product description

WHITEFLEX Black Edition USB cable 2m, very flexible, cable diameter only 3mm, very short plugs (25mm), colour: black, for USB 2.0 and USB 1.1, high quality, plug A to plug B (USB standard)

## Key Features

- Whiteflex USB 2.0 cable / Black Edition
- black & flexible
- Ø about 3mm
- very small plugs
- High End COPARTNER cable material with UL 2725
- 28AWG/2C + 30AWG/1P
- E119932 AWM 2725 80? 30V VW-1 COPARTNER
- USB 2.0 plug A male to USB 2.0 plug B male
- USB 2.0 High Speed kompatible
- for 480 MBit/s (high speed), 12 MBit/s (full speed) and 1.5 MBit/s (low speed)
- RoHS compliant

More images

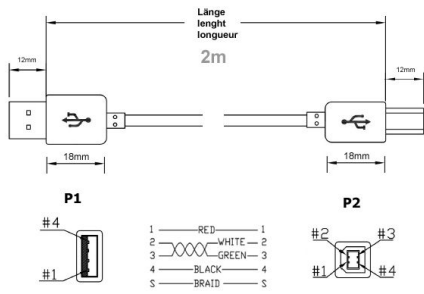


**whiteflex**  
black edition




**whiteflex**  
black edition



**whiteflex**  
black edition

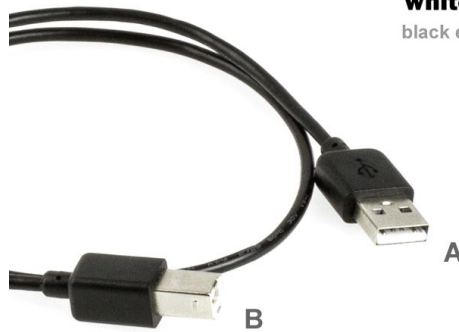

**whiteflex**  
black edition

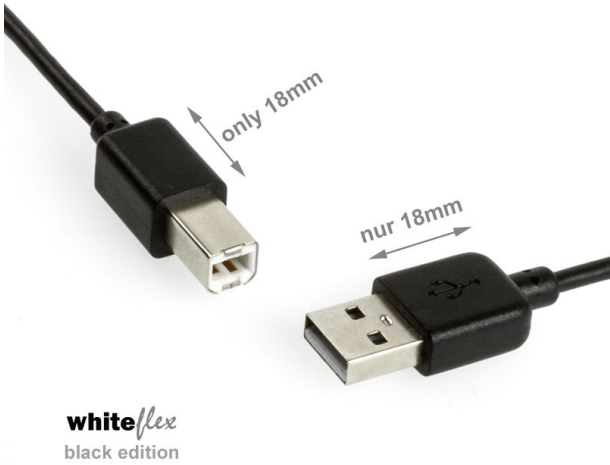

**SPECIFICATION:** IP\*30AWG +2C\*28AWG+AL.Mylar +Braid

ITEM	SPECIFICATION		
CONDUCTOR	AWG	30AWG	28AWG
	MATERIAL	TINNED COPPER	TINNED COPPER
	COND SIZE	7/0.10 ± 0.008mm	7/0.127 ± 0.008mm
	MIN.AVG.THICK	0.15mm	0.10mm
INSULATION	MATERIAL	HD-PE	SR-PVC LOW TOXIC
	O . D	0.66 ± 0.05mm	0.60 ± 0.05mm
	N . O.	1P	2C
DRAIN	AWG		
	MATERIAL		
	SIZE		
Face Outside	COVERAGE	100%	
AL.MYLAR	OVERLAP	25% MIN	
BRAID	MATERIAL	TINNED COPPER	
COPPER	SIZE	16 *4 0.10± 0.008mm	
	MIN.AVG.THICK	0.23mm	
JACKET	MATERIAL	HALF MATT PVC	
	COLOUR	ULS13 BLACK	
	O . D	3.00 ± 0.15 mm	


**ELECTRICAL CHARACTERISTICS**

1. Rating : TEMP 80°C; VOLTAGE 30V
2. Conductor Resistance: at 20°C MAX  
30AWG 376.96Ω/km; 28AWG 237.25Ω/km
3. Insulation Resistance: 10MΩ·km min at 20°C dc 500V
4. Dielectric Strength: AC 500V/1minute

**COLOUR CODE:**  
2C\*28AWG: 1.RED 2.BLACK  
IP\*30AWG: GREEN\*WHITE

**PHYSICAL PROPERTIES OF JACKET**

1. Flexibility test: NO CRACKING
2. Flame test: PASS VW-1



E119932 AWM 2725 80 30V VW-1 COPARTNER



(C) COPARTNER WIRE & CABLE (SHENZHEN) MFG CO., LTD.