

USB 3.0 cable A to MICRO B with screws 25cm

Product number BUM-S18-02

Length 250mm



Product description

USB 3.0 Micro B cable, length 25cm, plug USB 3.0 A to USB 3.0 Micro B with screws, screw spacing 18mm, screw type M2 x 0.4, AWG24/26, double shielded, Super-Speed-Modus (max. 5Gbps), black

Key features

- Very short USB 3.0 Micro B cable with 2 screws
- for industrial cameras according to USB3 Vision Standard™
- USB 3.0 type A plug male to USB 3.0 type Micro B male with screws
- Screw type: M2 x 0.4 (standard)
- Screw distance: 18 mm according to USB3 Vision Standard™
- Never exceed a max. torque of 0.3 Nm when fastening the M2 screws.
- High end UL 2725 cable material e.g. from Space Shuttle (E101344) or from DER AN (E74020-C)
- 28 AWG data cable and 26 AWG power cable (CU)
- Cable diameter: approx. 5.5 mm
- Data transfer rate up to 5 Gb/s
- e.g. for cameras from Point Grey (e.g. Grasshopper3), Baumer Optronic (e.g. VisiLine Serie with USB3 Vision interface, Modell VLU), Basler (e.g. ace USB 3.0 Camera), IDS Imaging Development Systems (e.g. USB3 uEye LE, uEye ML, uEye LE), Toshiba Teli (BU Serie), Sentech (STC-M Serie), Matrix Vision (e.g. USB3 Vision - mvBlueFOX3) or XIMEA.
- Customs tariff no. for USB 3.0 cables: 85444290
- Blue contact carrier according to USB 3.0 standard
- Colour: black
- CE, WEEE, RoHS-compliant according to current EU environmental regulations

More images



25cm




M2 x 0.4



USB 3.0 A

USB 3.0 Micro B

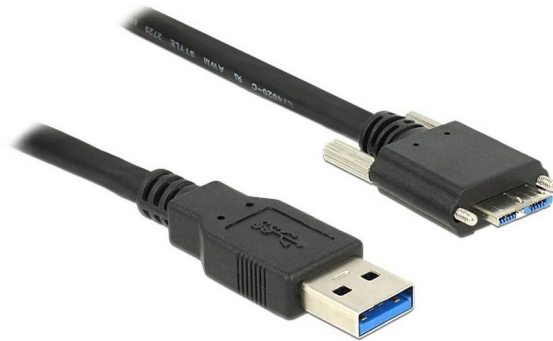

very short

UL 2775 VW-1 80°C 30V



very short