

# WHITEFLEX Black Edition USB 2.0 cable black + flexible 1m

**Product number** ART-10  
**Length** 1000mm




## Product description

WHITEFLEX Black Edition USB cable 1m, very flexible, cable diameter only 3mm, very short plugs (25mm), colour: black, for USB 2.0 and USB 1.1, high quality, plug A to plug B (USB standard)

## Key Features

- Whiteflex USB 2.0 cable / Black Edition
- black & flexible
- Ø about 3mm
- very small plugs
- High End COPARTNER cable material with UL 2725
- 28AWG/2C + 30AWG/1P
- E119932 AWM 2725 80? 30V VW-1 COPARTNER
- USB 2.0 plug A male to USB 2.0 plug B male
- USB 2.0 High Speed kompatibel
- for 480 MBit/s (high speed), 12 MBit/s (full speed) and 1.5 MBit/s (low speed)
- RoHS compliant

More images

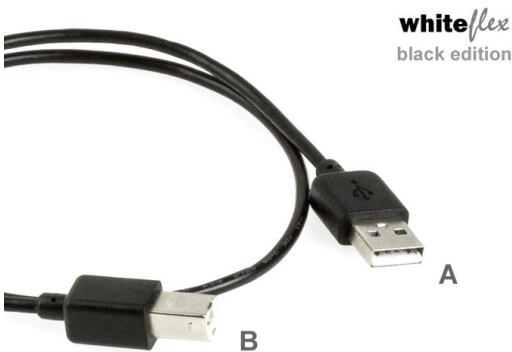


SPECIFICATION:		1P*30AWG +2C*28AWG+AL Mylar +Braid	
ITEM	SPECIFICATION		
CONDUCTOR	AWG	30AWG	28AWG
	MATERIAL	TINNED COPPER	TINNED COPPER
	COND.SIZE	7.0.10 ± 0.008mm	7.0.127 ± 0.008mm
INSULATION	MIN.AVG.THICK	0.15mm	0.10mm
	MATERIAL	HD-PE	SR-PVC LOW TOXIC
	O - D	0.66 ± 0.05mm	0.60 ± 0.05mm
	N.O.	1P	2C
DRAIN	AWG		
	MATERIAL		
	SIZE		
Face Outside	COVERAGE	100%	
AL MYLAR	OVERLAP	25% MIN	
BRAID	MATERIAL	TINNED COPPER	
COPPER	SIZE	16 *4.0.10± 0.008mm	
	MIN.AVG.THICK	0.23mm	
JACKET	MATERIAL	HALF MATT PVC	
	COLOUR	UL813 BLACK	
	O - D	3.00 ± 0.15 mm	

- ELECTRICAL CHARACTERISTICS**
- Rating : TEMP 80°C; VOLTAGE 30V
  - Conductor Resistance: at 20°C MAX  
30AWG 376.96Ω/km ;28AWG 237.25Ω/km
  - Insulation Resistance: 10MΩ·km min at 20°C,dc 500V
  - Dielectric Strength: AC 500V/1minute

**COLOUR CODE:**  
2C\*28AWG: 1.RED 2.BLACK  
1P\*30AWG: GREEN\*WHITE


- PHYSICAL PROPERTIES OF JACKET**
- Flexibility test: NO CRACKING
  - Flame test: PASS VW-1



E119932 AWM 2725 80 30V VW-1 COPARTNER



(C) COPARTNER WIRE & CABLE (SHENZHEN) MFG CO., LTD.

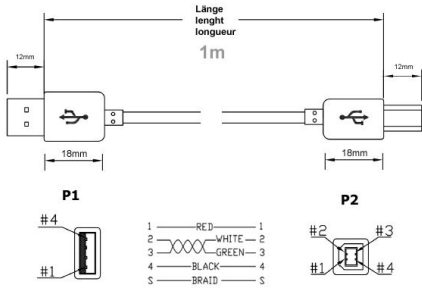

**whiteflex**  
black edition



**whiteflex**  
black edition



**whiteflex**  
black edition