

Flexible USB 3.0 cable quality PREMIUM+ with 2 ferrite cores INDUSTRIAL VERSION 2m

Product number BU-UF-20
Length 2000mm



Product description

Flexible USB 3.0 cable, 2m, quality PREMIUM+ with 2 ferrite cores, AWG 22/28, double shielded, Super Speed Mode (max. 5Gbps), USB3 A plug male to USB3 B plug male, colour: anthracite blue

Highlights

- flexible USB 3.0 cable plug A to B
- innovative, highly flexible cable jacket material
- feels like rubber
- good layability and small bending radii
- thick copper cores: Power AWG 22
- 2 ferrite cores


Technical details

- flexible USB 3.0 cable AB
- PREMIUM+ quality
- with 2 ferrite cores (can be positioned alternatively)
- Innovative, highly flexible cable jacket material: Polyolefin UltraFlex
- for good layability and small bending radii (up to 10mm)
- significantly better durability compared to standard cables
- up to 8500 movement cycles under load
- double shielding (foil shield and braided shield)
- cable material: ULTRA FLEX HI-PQ CABLE TOTAL TECHNOLOGIES LTD
- cross section: 28AWG/1P 22AWG/2C (i.e. extra thick BusPower cores), copper
- outer diameter: 7mm plus/minus 0.15mm
- data strands twisted in pairs
- suitable for data transfer rates of up to 5.0 Gbit/s
- USB 3.0 A male connector to USB 3.0 B male connector
- contact carrier in blue in accordance with USB 3.0 standard
- colour: black plugs and anthracite-blue cable material
- USB 3.0 B plug in particularly slim design
- SuperSpeed USB 3.0 compatible
- WEEE, compliant with RoHS Directive 2011/65/EU & California Prop.65 compliant

More images



PINOUT

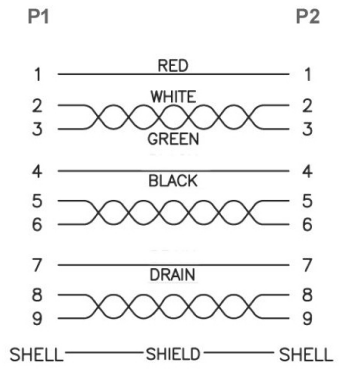

ULTRA FLEX



