

WHITEFLEX Black Edition USB 2.0 cable black + flexible 60cm

Product number ART-06

Length 600mm




Product description

WHITEFLEX Black Edition USB cable 60cm, very flexible, cable diameter only 3mm, very short plugs (25mm), colour: black, for USB 2.0 and USB 1.1, high quality, plug A to plug B (USB standard)

Key Features

- Whiteflex USB 2.0 cable / Black Edition
- black & flexible
- Ø about 3mm
- very small plugs
- High End COPARTNER cable material with UL 2725
- 28AWG/2C + 30AWG/1P
- E119932 AWM 2725 80? 30V VW-1 COPARTNER
- USB 2.0 plug A male to USB 2.0 plug B male
- USB 2.0 High Speed kompatible
- for 480 MBit/s (high speed), 12 MBit/s (full speed) and 1.5 MBit/s (low speed)
- RoHS compliant

More images

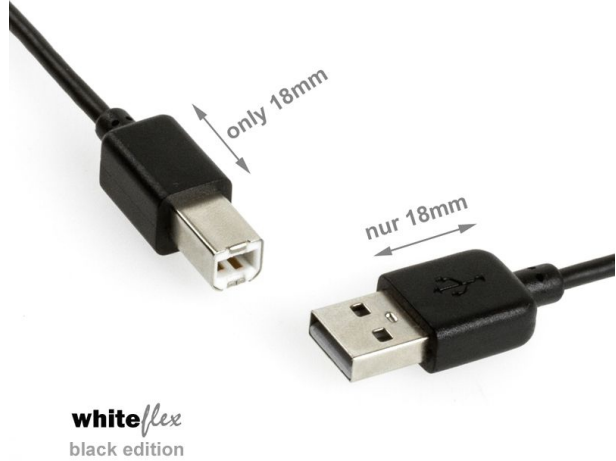


SPECIFICATION: | 1P*30AWG +2C*28AWG+AL Mylar +Braid

ITEM	SPECIFICATION	
CONDUCTOR	AWG	30AWG 28AWG
	MATERIAL	TINNED COPPER TINNED COPPER
	COND.SIZE	7/0.10 ± 0.008mm 7/0.127 ± 0.008mm
INSULATION	MIN.AVG.THICK	0.15mm 0.10mm
	MATERIAL	HD-PE SR-PVC LOW TOXIC
	O. D	0.66 ± 0.05mm 0.60 ± 0.05mm
	N.O.	1P 2C
DRAIN	AWG	\
	MATERIAL	\
Face Outside	COVERAGE	100%
	AL.MYLAR	OVERLAP 25% MIN
BRAID	MATERIAL	TINNED COPPER
COPPER	SIZE	16 *4/0.10± 0.008mm
	MIN.AVG.THICK	0.23mm
JACKET	MATERIAL	HALF MATT PVC
	COLOUR	UL813 BLACK
	O. D	3.00 ± 0.15 mm

- ELECTRICAL CHARACTERISTICS**
- Rating : TEMP 80°C; VOLTAGE 30V
 - Conductor Resistance: at 20°C MAX
30AWG 376.96Ω/km ;28AWG 237.25Ω/km
 - Insulation Resistance: 10MΩ·km min at 20°C de 500V
 - Dielectric Strength: AC 500V/1minite


- PHYSICAL PROPERTIES OF JACKET**
- Flexibility test: NO CRACKING
 - Flame test: PASS VW-1

COLOUR CODE:
 2C*28AWG: 1.RED 2.BLACK
 1P*30AWG: GREEN*WHITE



(C) COPARTNER WIRE & CABLE (SHENZHEN) MFG CO., LTD.



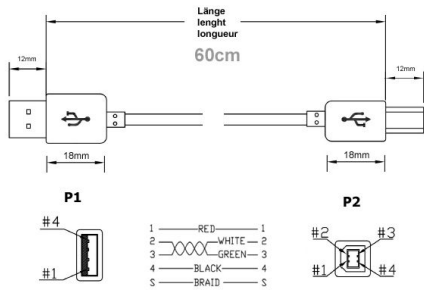

whiteflex
black edition

