

# USB 2.0 cable with ferrite core, black, 3m

**Product number** CU-FB-3  
**Length** 3000mm



## Product description

USB 2.0 cable with 1x ferrite core, length 3m, double shielded, max. 480 Mbps, colour: black


## Key features

- **USB 2.0 cable**
- **1 ferrite core** (on the side of the A connector)
- copper core thickness according to USB standard: **AWG28 + AWG24**
- double shielded with foil and braid shield
- shielded connectors with moulded strain relief
- USB 2.0 plug type A male (system side/upstream)
- USB 2.0 plug type B male (to peripheral device/downstream)
- USB 2.0 High Speed + downward compatible to USB 1.1
- suitable for 480 MBit/s (high speed), 12 MBit/s (full speed) and 1.5 MBit/s (low speed)
- cable diameter Ø approx. only 4mm
- colour: black
- CE, WEEE, RoHS compliant

More images



Ferrit




PINOUT

POWER	AWG 24	1	1	ROT   RED
DATA	AWG 28	2	2	WEISS   WHITE
DATA	AWG 28	3	3	GRÜN   GREEN
POWER	AWG 24	4	4	SCHWARZ   BLACK

SHELL BRAID + DRAIN

SHELL





= paarig verdrillt | twisted pair

AWG 28/1P  
AWG 24/2C



CU

## USB 2.0

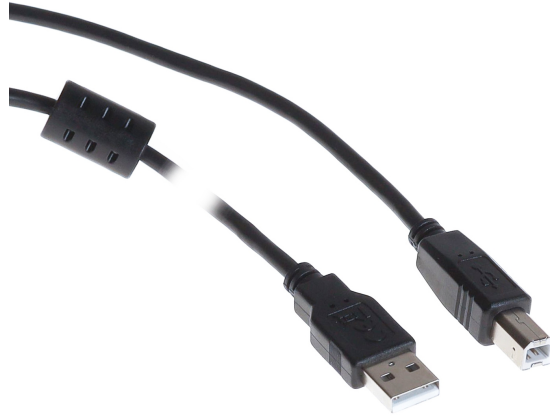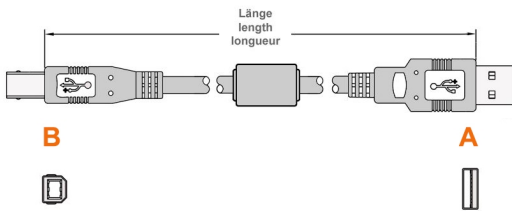

**parts** data

