

USB 2.0 cable with ferrite core, black, 2m

Product number CU-FB-2
Length 2000mm



Product description

USB 2.0 cable with 1x ferrite core, length 2m, double shielded, max. 480 Mbps, colour: black

Key features

- **USB 2.0 cable**
- **1 ferrite core** (on the side of the A connector)
- copper core thickness according to USB standard: **AWG28 + AWG24**
- double shielded with foil and braid shield
- shielded connectors with moulded strain relief
- USB 2.0 plug type A male (system side/upstream)
- USB 2.0 plug type B male (to peripheral device/downstream)
- USB 2.0 High Speed + downward compatible to USB 1.1
- suitable for 480 MBit/s (high speed), 12 MBit/s (full speed) and 1.5 MBit/s (low speed)
- cable diameter Ø approx. only 4mm
- colour: black
- CE, WEEE, RoHS compliant

More images


Ferrit




AWG 28/1P
AWG 24/2C




CU

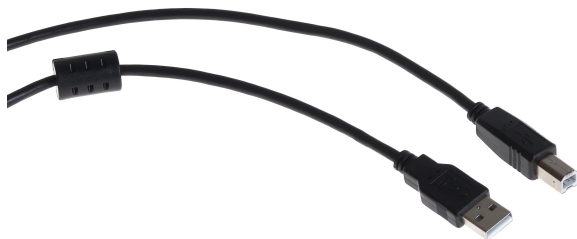


USB 2.0

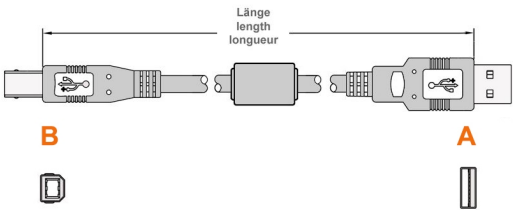

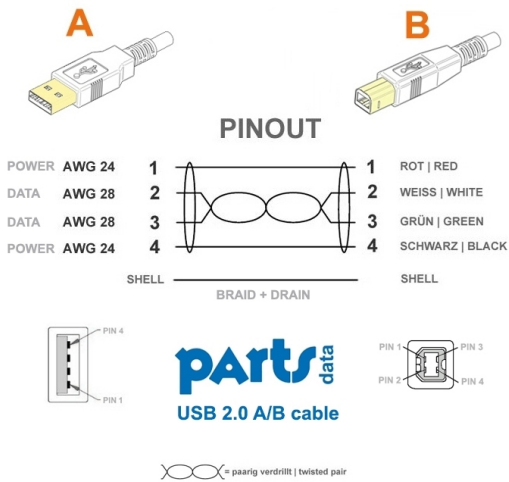

PINOUT

POWER	AWG 24	1	1	ROT RED
DATA	AWG 28	2	2	WEISS WHITE
DATA	AWG 28	3	3	GRÜN GREEN
POWER	AWG 24	4	4	SCHWARZ BLACK



SHELL

BRAID + DRAIN




SHELL



PIN 4

PIN 1



PIN 1


PIN 2

PIN 3

PIN 4

parts data
USB 2.0 A/B cable

 = paarig verdrillt | twisted pair

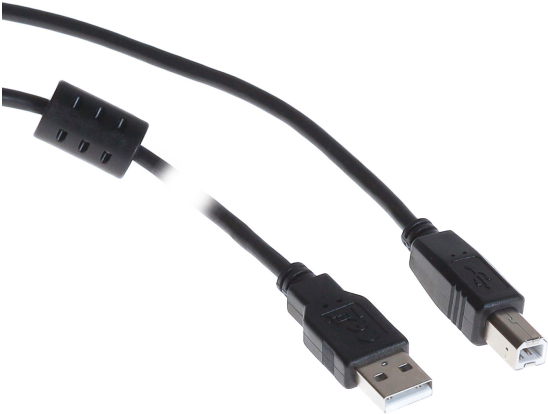

parts data

